



Construction equipment

Technical Data Sheet

CONCRETE BUCKETS

Conical concrete bucket


C Model

BACK TO BASICS!

We proudly introduce you our cut-height bucket model C with bottom discharge, ideal for **batching plants and truck mixers**. This model presents **bottom discharge**. The bucket is manufactured in many different capacities as listed below. We offer also the CL series with side chute for a lateral discharge. Both these models are available painted or galvanized. The galvanization process gives the bucket a higher quality and a longer life, as it forms a coating of corrosion-resistant zinc which prevents corrosive substances from reaching the more delicate part of the metal.

All our buckets are built to meet or exceed the regulations of EN, ASME and UNI and come with the required labels, certificates and user and maintenance manual. All our products are covered by a 1-year warranty (EU Directive).



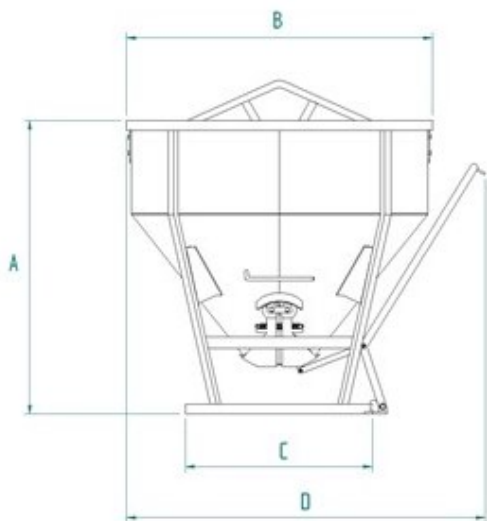

| MODEL | CAPACITY (Lt) | DIMENSIONS (mm) | | | | CAP. (kg) | WEIGHT (kg) |
|-------|---------------|-----------------|------|-----|------|-----------|-------------|
| | | A | B | C | D | | |
| C-15 | 150 | 540 | 920 | 750 | 1050 | 390 | 50 |
| C-20 | 200 | 620 | 920 | 750 | 1050 | 520 | 55 |
| C-25 | 250 | 700 | 920 | 750 | 1050 | 650 | 60 |
| C-30 | 300 | 780 | 920 | 750 | 1050 | 780 | 65 |
| C-35 | 350 | 860 | 920 | 750 | 1050 | 910 | 70 |
| C-40 | 400 | 890 | 1050 | 880 | 1200 | 1040 | 75 |
| C-50 | 500 | 950 | 1050 | 880 | 1200 | 1300 | 80 |
| C-60 | 600 | 1070 | 1050 | 880 | 1200 | 1560 | 85 |
| C-80 | 800 | 1120 | 1250 | 750 | 1450 | 2080 | 135 |
| C-99 | 1000 | 1300 | 1250 | 750 | 1450 | 2600 | 150 |
| C-150 | 1500 | 1800 | 1250 | 750 | 1450 | 3900 | 230 |



Boscario srl
 Via G. Cederle, 1 - 36020
 Campiglia dei Berici (Vicenza) Italy

Tel +39 0444 866520
 Fax +39 0444 866350
 P.IVA: 00672450244